

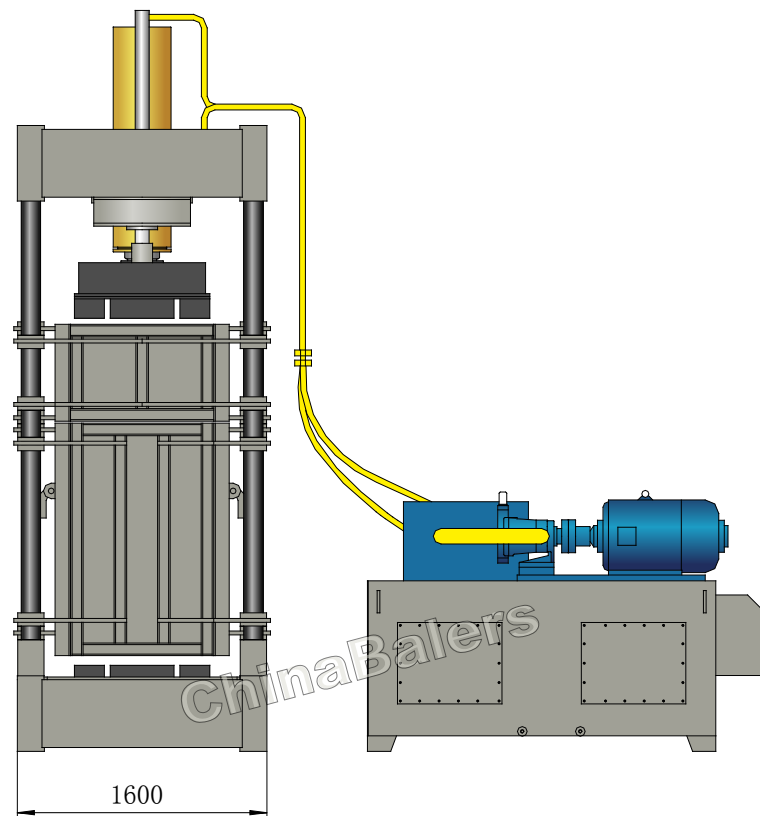


YE82-120Q

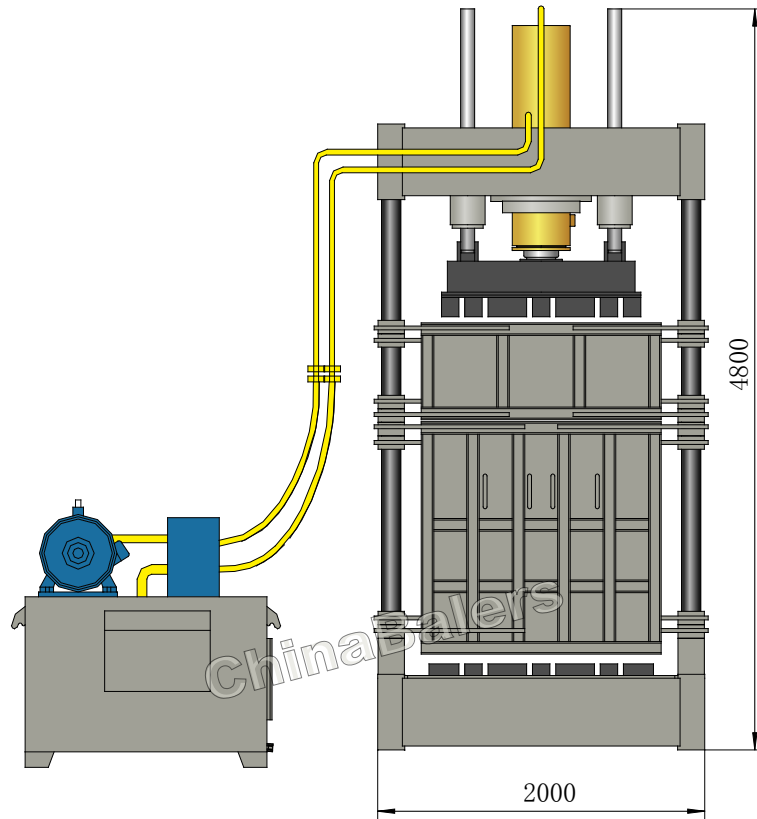

YE82-120Q



PE Film Baler

Model: YE82-120Q

Power System (Motor)

Type:	Y180M-4
Rated Power:	18.5 kW
Rated Speed:	1470 rpm
Power Spec:	3PH, 50 / 60Hz

System Parameters

Main Pressure Cyl. Force:	120 Ton
Locking Cyl. Force:	2×25 Ton
Hydraulic System Pressure:	25 MPa

Hydraulic System (Pump)

Type:	80YCY14-1B
Rated Displacement:	80 ml/r
Max Operating Pressure:	31.5 MPa

Standard Configuration

NOK (JAPAN) Seal Packings for Cylinders.

Operation System

Manual Valve Operation

General Description

Main Machine Size (L×W×H):	2000×1600×4800 mm
Press Box Size (L×W×H):	1120×740×1700 mm
Space Between Ram & Bottom:	Max. 1800 mm; Min. 400 mm
Bale Size (L×W):	1120×740 mm
Bale Weight (PE Film):	250-400 kg
Production Rate (PE Film):	750-1400 kg/hr
Strapping:	5 Steel Strips, 2-way, Manual Strapping.
Bale Discharging:	Manual Discharging
Shipping Weight:	Approx. 7.2 tons
Loading (Standard Containers):	1×20'GP

Hydraulic Oil Brand

Oil Tank Volume: 480 ltr

ISO VG	China	U.S.		Britain	France
	GB11118.1	CALTEX CO.	MOBIL	SHELL	ELF CO.
HM 46	46 #	Rando HD46	D.T.E46	Tellus 46	Elfolna 46
HM 68	68 #	Rando HD68	D.T.E68	Tellus 68	Elfolna 68

Above information are indicative not engaging. Rights reserved for change if necessary.