

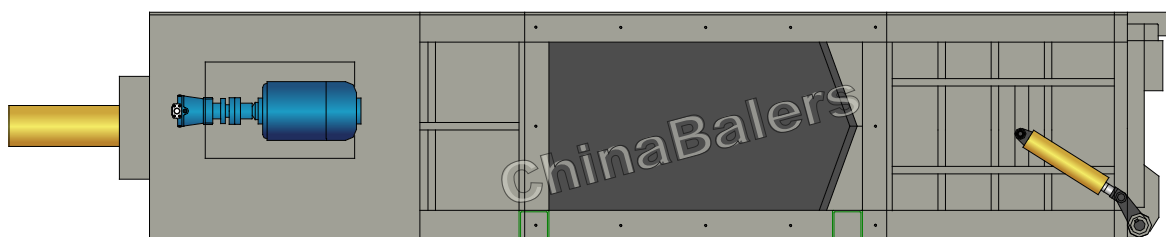
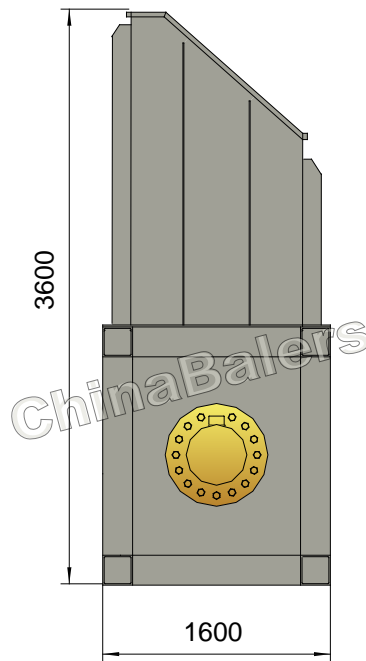


HPM125A

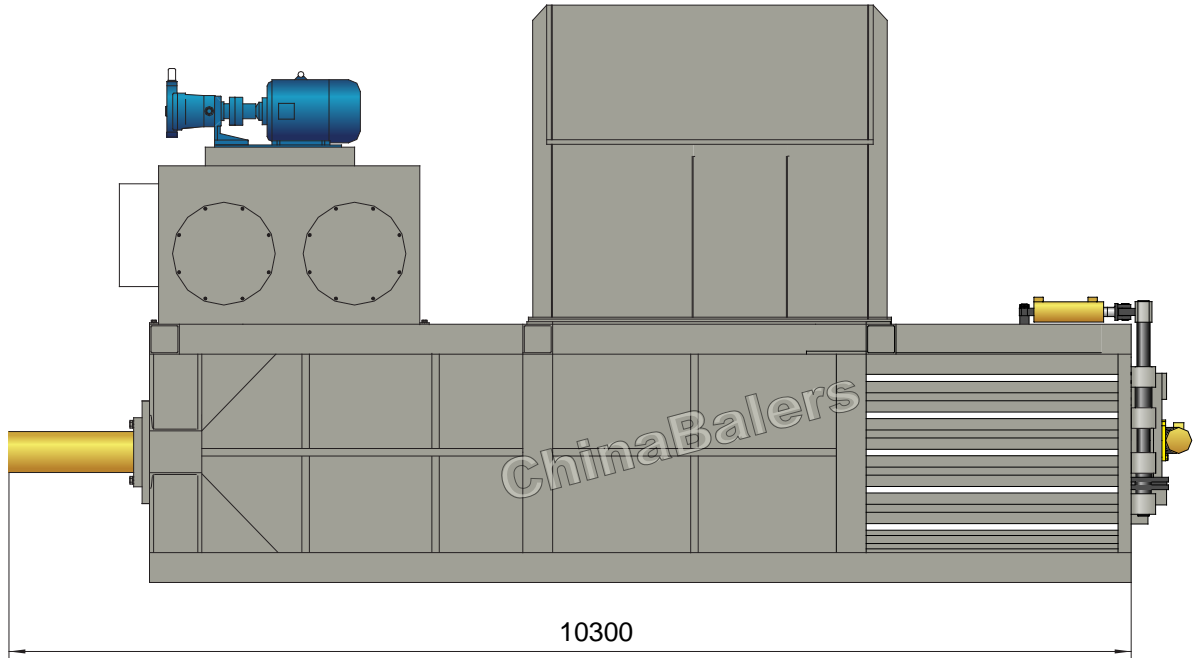

HPM125A



Paper Waste Baler

Model: HPM125A

Power System (Main Motor)

| | |
|--------------|----------------|
| Type: | Y250M-6 |
| Rated Power: | 37 kW |
| Rated Speed: | 980 rpm |
| Power Spec: | 3PH, 50 / 60Hz |

System Parameters

| | |
|----------------------------|----------|
| Main Pressure Cyl. Force: | 125 Ton |
| Locking Cyl. Force: | 23.5 Ton |
| Open-door Cyl. Force: | 12.5 Ton |
| Hydraulic System Pressure: | 25 MPa |

Hydraulic System (Pump, 2 sets)

| | |
|-------------------------|-------------|
| Pump #1: | 250YCY14-1B |
| Rated Displacement: | 250 ml/r |
| Max Operating Pressure: | 31.5 MPa |

| | |
|-------------------------|------------|
| Pump #2: | 25YCY14-1B |
| Rated Displacement: | 25 ml/r |
| Max Operating Pressure: | 31.5 MPa |

Standard Configuration

V-shaped Cutting Blades; Oil Cooler;
Conveyor Width 1600mm, Powered by 7.5kW Motor;
Discharging Roll Powered by 0.75kW Motor.

Optional Configuration

NOK (JAPAN) Seal Packings for Cylinders;
Oil Heater; Magnetic Oil Filter;
Diesel / Diesel Generator for Power.

Operation System

PLC Operation

General Description

| | |
|-------------------------------------|--|
| Main Machine Size (L×W×H): | 10300×1600×3600 mm |
| Feeding Opening (L×W): | 2200×1100 mm |
| Bale Size (W×H): | 1100×900 mm |
| Bale Weight (Paper, Cardboard): | 630-900 kg |
| Production Rate (Paper, Cardboard): | 3.8-5.4 tons/hr |
| Strapping: | Tempered Iron Wire, ϕ 2.8/3.2mm, 4 Lines, Manual Strapping. |
| Shipping Weight: | Approx. 14.3+7 tons |
| Loading (Standard Containers): | 2×40'GP |

Hydraulic Oil Brand

Oil Tank Volume: 2000 ltr

| ISO VG | China | U.S. | | Britain | France |
|--------|-----------|------------|---------|-----------|------------|
| | GB11118.1 | CALTEX CO. | MOBIL | SHELL | ELF CO. |
| HM 46 | 46 # | Rando HD46 | D.T.E46 | Tellus 46 | Elfolna 46 |
| HM 68 | 68 # | Rando HD68 | D.T.E68 | Tellus 68 | Elfolna 68 |

Above information are indicative not engaging. Rights reserved for change if necessary.