


HPM63B




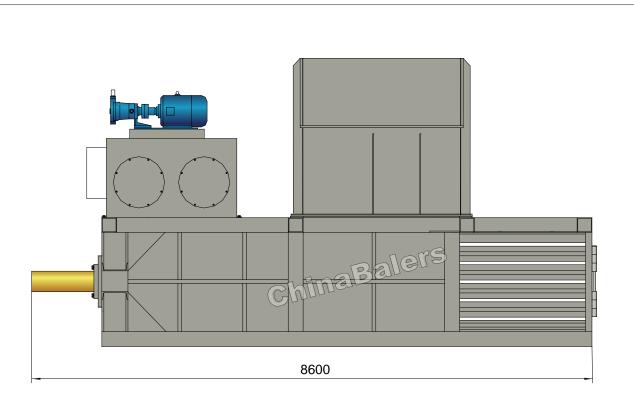

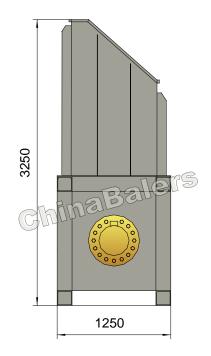

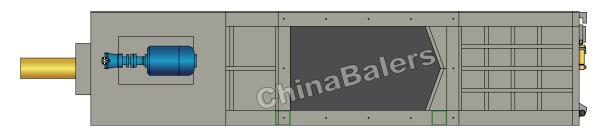

HPM63B



Horizontal Paper Baler

Power System (Main Motor)

Type: Y200L2-6
Rated Power: 22 kW
Rated Speed: 970 rpm

Power Spec: 3PH, 50 / 60Hz

Hydraulic System (Pump, 2 sets)

Pump #1: 160YCY14-1B

Rated Displacement: 160 ml/r Max Operating Pressure: 31.5 MPa

Pump #2: 25YCY14-1B

Rated Displacement: 25 ml/r Max Operating Pressure: 31.5 MPa

Operation System

PLC Operation

Model: HPM63B

System Parameters

Main Pressure Cyl. Force:63 TonLocking Cyl. Force:23.5 TonOpen-door Cyl. Force:12.5 TonHydraulic System Pressure:25 MPa

Standard Configuration

V-shaped Cutting Blades; Oil Cooler;

Conveyor Width 1200mm, Powered by 7.5kW Motor; Discharging Roll Powered by 0.75kW Motor.

Optional Configuration

NOK (JAPAN) Seal Packings for Cylinders;

Oil Heater; Magnetic Oil Filter; Diesel / Diesel Generator for Power.

General Description

Main Machine Size (L×W×H): 8600×1250×3250 mm

Feeding Opening (L×W): 1600×720 mm

Bale Size (W×H): 720×1100 mm

Bale Weight (Paper, Cardboard): 330-470 kg

Production Rate (Paper, Cardboard): 2.0-2.8 tons/hr

Strapping: Tempered Iron Wire, φ2.8/3.2mm, 5 Lines, Manual Strapping.

Shipping Weight: Approx. 10.2+6 tons

Loading (Standard Containers): 2×40'GP

Hydraulic Oil Brand

Oil Tank Volume: 1500 ltr

ISO VG	China	U.S.		Britain	France
	GB11118.1	CALTEX CO.	MOBIL	SHELL	ELF CO.
HM 46	46 #	Rando HD46	D.T.E46	Tellus 46	Elfolna 46
HM 68	68 #	Rando HD68	D.T.E68	Tellus 68	Elfolna 68

Above information are indicative not engaging. Rights reserved for change if necessary.